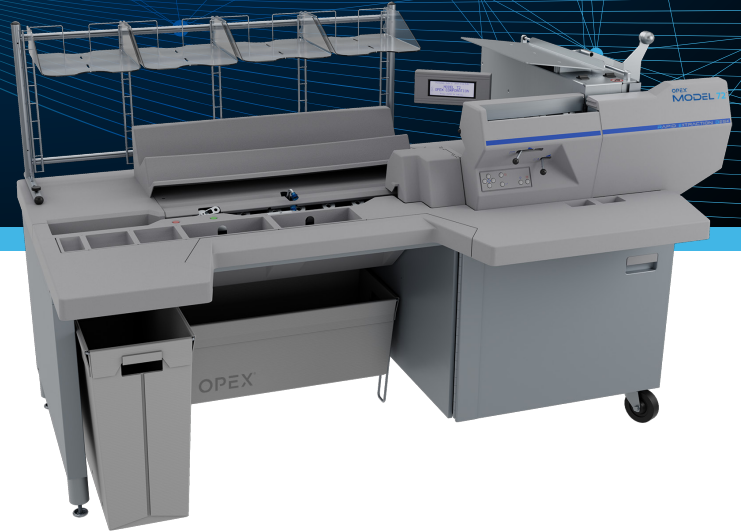# OPEX®
MODEL 72™
Rapid Ballot Extraction Desk

WHY MODEL 72™?

This is the next level of automation in mail opening, allowing you to reduce the number of temporary workers required in this largely manual process. It also adds more space for proper social distancing.

Today the Model 72™ rapid ballot extraction desk is being used in many counties for their Vote-By-Mail mail opening process, including the County of Riverside, Sacramento County and Denver County to name a few. Ballot extraction rates of over 2,000 per hour have been documented in Denver County leading to a reduction in the staff needed by 50%, providing results in a timely manner, and maintaining the same level of throughput as past elections.

FEATURES

MILLING CUTTING
This device has a smaller cut depth that significantly reduces the potential of cutting contents, while maintaining the integrity and security of mail in ballots.

EMPTY ENVELOPE VERIFICATION
This feature automatically confirms that everything is removed from the ballot return envelope..

PERFORMANCE CONTROL CENTER
The Model 72™ features a control center that can show ballot count and provide a statistical analysis of operator rates and productivity.

AUTO-JOGGER
Each envelope is auto-jogged to shift contents away from both cut edges to achieve a new level of content protection, and the ability to handle a wide array of return ballot envelopes.

ADVANTAGES

EFFICIENT
The Model 72™ is designed to improve extraction throughput, while significantly reducing the amount of labor needed.

FLEXIBLE
A wide variety of ballot envelopes can be opened safely and accurately.

BALLOT PROTECTION
Each ballot envelope is jogged to shift contents away from cut edges to secure ballot protection.

RELIABLE
With a nationwide network of direct employee, factory-trained service technicians, OPEX can provide assurance that the Model 72™ is delivering peak performance during elections.

FAST DELIVERY
The Model 72™ can be delivered to a ballot extraction site within 60-90 days from receipt of order. (Subject to demand.)

RAPID INSTALLATION
Installation can be started and completed on the day of delivery.

SPECIFICATIONS

BASIC SYSTEM CONFIGURATION

Dimensions (H x W x D)	47" x 76" x 41" (119.4 cm x 193 cm x 104.1 cm)
Envelope Feeding	Friction-based feeder up to 22" of mail
Envelope Width	3.5" – 6.38" (8.89 cm -16.21 cm)
Envelope Length	5" – 11.5" (12.7 cm x 29.21 cm)
Envelope Thickness	Up to 0.375" (0.953 cm)
Cycle Rate	Up to 3,600 mail pieces per hour
Top Cutter	Milling
Additional Features	Verifier Operator LCD Integrated workstation Tray Holder
Daily Duty Cycle	Unlimited
Popular Optional Features	Ergonomic desk chair

The Model 72™ Rapid Extraction Desk is designed by OPEX® Corporation, a recognized global technology leader in high-speed mailroom automation, document imaging, and warehouse automation. Our manufacturing facilities are located in Moorestown, New Jersey.

Please visit opex.com or call 856.727.1100 for further information.

Have questions?

Contact us.

🌐 digitizeyourdocuments.com

✉ info@opex.com

OPEX®